


CATEGORY PRODUCTS

POLYPROPYLENE FILTER CARTRIDGE



Typical Flow Characteristics @25°C (10'')

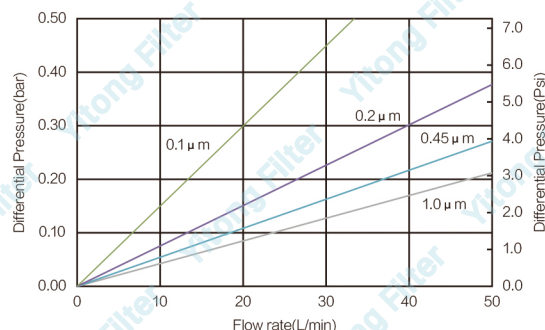

Materials and working environment

Outside diameter (OD)	60 / 64 / 68 / 70mm
Inner diameter (ID)	33mm
Effective Filter Area	≥ 0.65m ² / 10in
Maximum Operating Temperature	80 °C / 176F
Maximum Forward Differential Pressure	0.4MPa@23 °C / 58.8psid@73.4
Steaming Sterilize	121 °C / 30min

Main applications

Used to clarify filtration, pre-filtration stage of filtration systems.